






R2..-S..

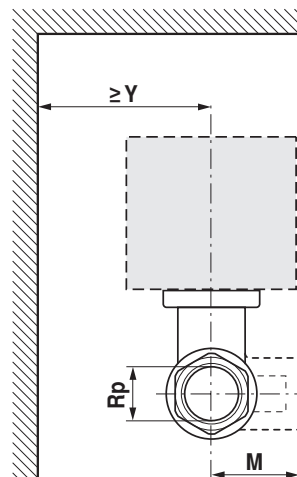





R3..-S..

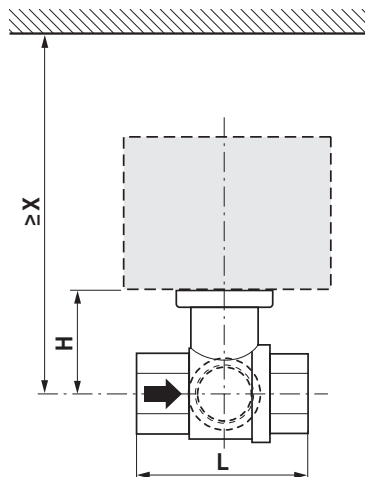

71270-00001.C



t -10 ... +120 °C																											
p _s 1600 kPa																											
		DN	Rp	mm				80 °C		100 °C		120 °C						100 °C		120 °C							
								KR..		TR..		LR..A		NR..A		SR..A		TRF..		LRF..		NRF..A		SRF..A			
		mm	”	L	H	M	L1	X	Y	X	Y	X	Y	X	Y	X	Y	X	Y	X	Y	X	Y	X	Y	X	Y
R2015..-S1	R3015..-S1	15	1/2”	67	44	36	13	150	75	185	75	195	75	230	80	230	80	190	80	200	90	220	90	220	90		
R2020..-S2	R3020..-S2	20	3/4”	78	46	41.5	14					200	75	235	80	235	80			205	90	225	90	225	90		
R2025..-S2	R3025..-S2	25	1“	87	46	45	16					200	75	235	80	235	80			205	90	225	90	225	90		
R2032..-S3	R3032..-S3	32	1 1/4“	105	50.5	55.5	19							240	80	240	80					230	90	230	90		
R2040..-S3	R3040..-S3	40	1 1/2“	111	50.5	56	19							240	80	240	80					230	90	230	90		
	R3040-25-S4	40	1 1/2“	122	62	66.5	19									250	80							240	90		
R2050..-S4	R3050..-S4	50	2“	125	56	68	22									245	80							235	90		
	R3050-40-S4 R3050-58-S4	50	2“	142	68	79	22									262	80							252	90		

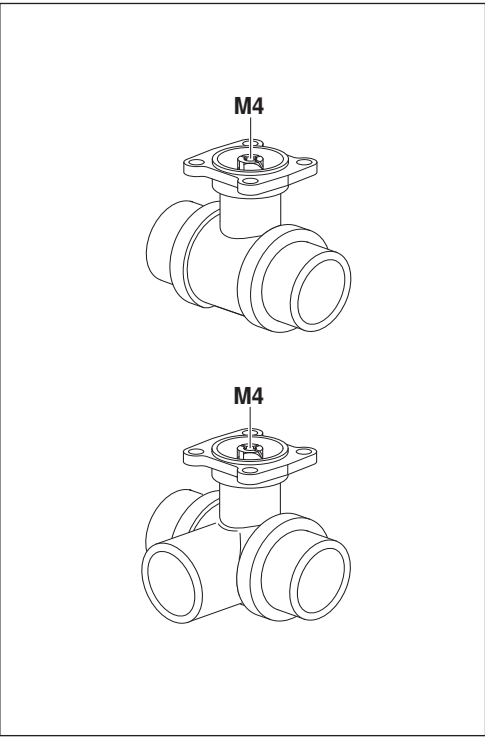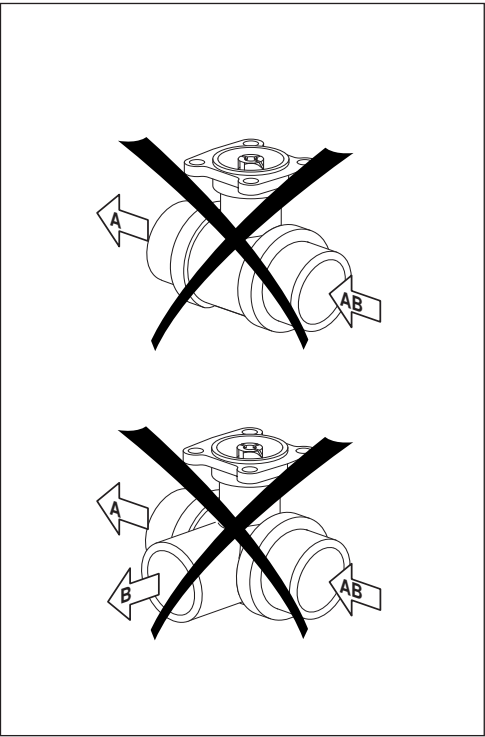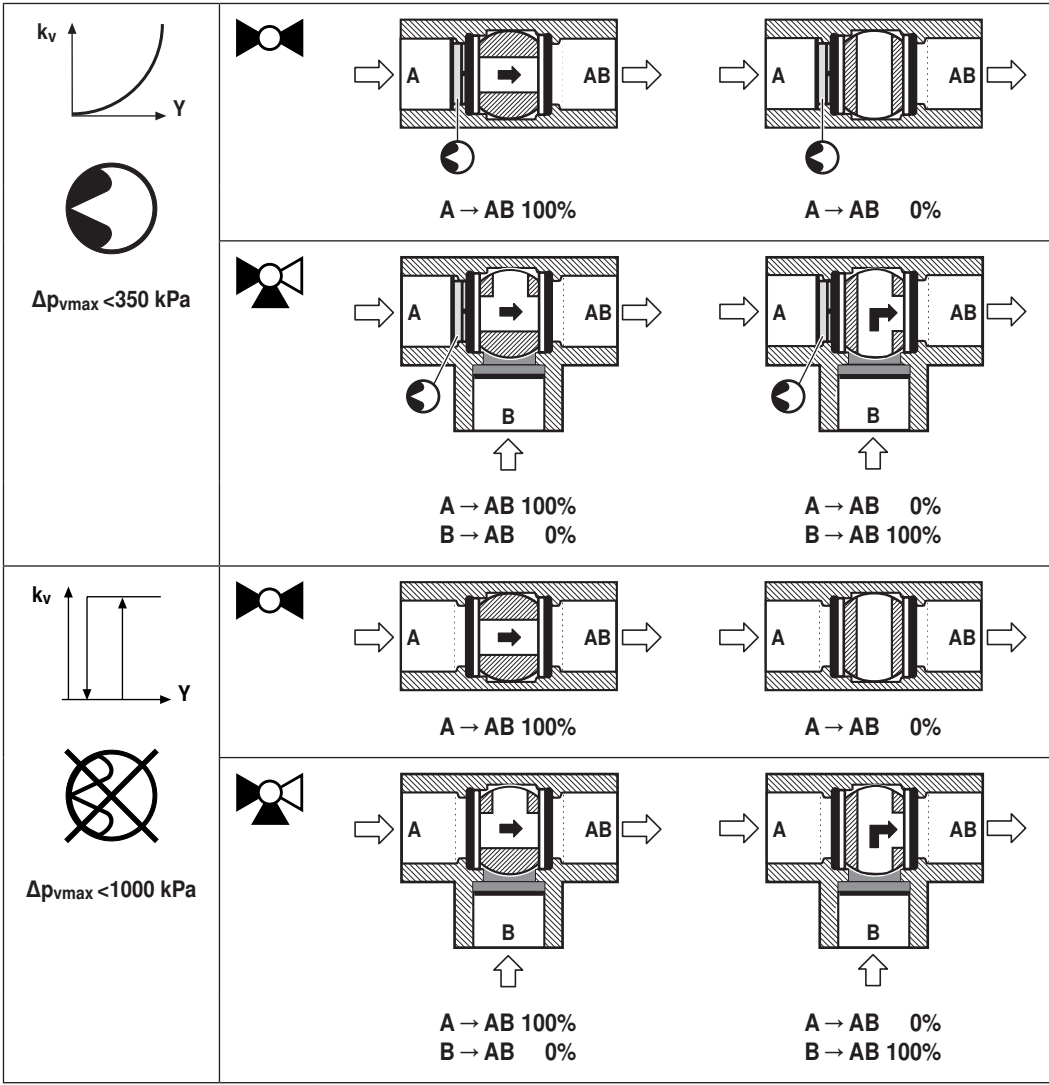

	A → AB 100%	A → AB 0%
	B → AB 0%	B → AB 100%

