


SystemView 7" touch panel with bracket SH-Systemview7



This SystemView 7 inch touch panel has a slim and sleek pro- file for easy mounting. It is equipped with an advanced processor for smooth and high-speed performance. This touch panel features a large capacitive touch screen for easy viewing.

The SystemView 7 is a perfect (low-cost) solution for rugged monitoring in cabinets or as a graphics viewer for web servers.

Dimensions

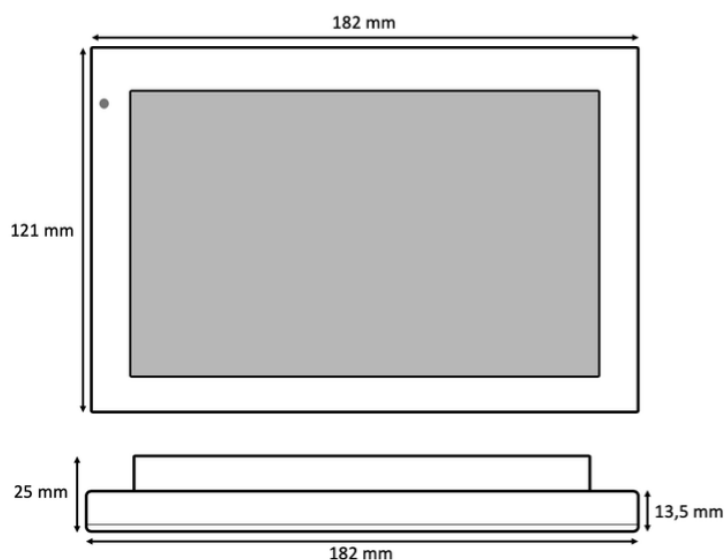

Hardware specification:

Solution	Allwinner A83T processor
CPU	8-Core ARM Cortex A7 CPU, 1.2Ghz
Display	7 Inch IPS Display, Resolution: 1024 x 600, Brightness: 350 cd/m2
RAM	2GB
Nand Flash	8GB
Operating temp	0 to 50 °C (32 to 122 °F)
Operating humidity	10% to 95% relative humidity non-condensing

Software features:

System	Google Android 6.0.1
Video	H.264 2160p video decoding, Multi-format FHD video decoding, including Mpeg1/2, Mpeg4 SP/ASP GMC, H.263, H.264, VP6/8, AVS jizun, Jpeg/Mjpeg,etc. H.264 High Profile 1080p@30fps or 720@60fps encoding 3840 x 1080@30fps 3D decoding, BD/SBS/TAB/FP supported Complies with RTSP, HTTP, HLS, RTMP, MMS streaming media protocols
Audio	Two Speakers 2 X 1 Watt (Integrated 3W Amplifier For External Speakers)
Language	Support multi-languages
Customized soft	Auto Run SystemView app when it is booted

Interfaces:

Back	- Ethernet Interface (RJ45) - HDMI Out - USB Socket - DC IN Power Terminal (9V~30V)
------	----------------------------------------------------------------------------------------------

Network:

Bluetooth	Bluetooth v2.1+EDR/ Bluetooth 3.0/3.0+HS/4.0
Wi-Fi	WIFI (802.11b/g/n)
LAN Port	Ethernet RJ45

Accessories:

Power Supply	Power Supply: 9~36VDC (at least 1A for 12V) Consumption: 3~8W
Mounting	Integrated bracket for flush/in wall mounting and metal clips for metal door mounting.